

Omni view 270° /360° LED-flits combinatie

Wiring

To Chassis Ground:..... **BLACK**

To+VDC for Warning Mode ❶ (fuse @ 3A):..... **RED**

Default Flash Pattern - FP#1 Double [2Hz]

To+VDC for Warning Mode ❷ (fuse @ 3A):..... **WHITE**

Default Flash Pattern - FP#18 Steady Scene (Cruise Mode)

For Warning Mode ❶ Low Power Operation: **RED+WHITE**


NOTE: For ECE R65 Class 1 models, low power operation is disabled by default.

For Synchronization and Flash Pattern:....**YELLOW**

Connect **YELLOW** wires of all lightheads together for synchronization.

(All lightheads should be set to the same Flash Pattern)

NOTE: When arranging lightheads to comply with ECE R65 CAT "HT" or "T", all units must be synchronized.

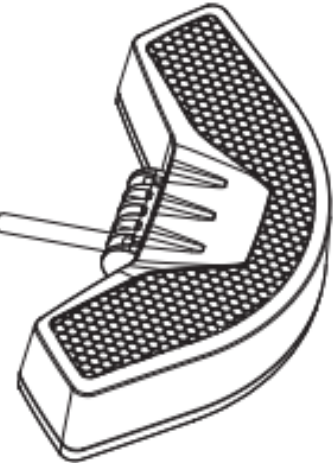

Operation

For Flash Pattern Selection:

Each warning mode may select and save one flash pattern. While activating a warning mode, momentarily apply **YELLOW** wire to +VDC:

- Once to the next pattern.
- Quick three times to the default flash pattern (FP#1 or FP#18).

Flash Pattern							
1	Double	[2Hz]	7	Single	[SAE/CA13]	13	Giga
2	Single	[2Hz]	8	Double	[SAE]	14	Ultra [SAE]
3	Triple	[2Hz]	9	Triple	[SAE]	15	Single-Quad
4	Quad	[2Hz]	10	Quad	[SAE]	16	Single H/L
5	Random		11	Quint	[SAE]	17	Single-Triple-Quint
6	Steady EF*		12	Mega		18	Steady Scene (Cruise Mode)

* For use with external flash controller.

For Low Power Operation / Disabling Low Power Operation:

While Warning Mode ❶ is activated, apply **WHITE** wire to +VDC for Low Power Operation.

To disable Low Power Operation, momentarily apply **YELLOW** wire to +VDC once to force High Power Operation and permanently disable Low Power Operation. Re-activate Low Power Operation by momentarily apply **YELLOW** wire to +VDC again.

NOTE: When arranging lightheads to comply with ECE R65 Class 1, disable Low Power Operation or make **RED** and **WHITE** wire in mutually exclusive switching.

For Simultaneous or Alternating Synchronization:

1. Power up the unit by applying +VDC to **RED** or (**WHITE**) and **YELLOW** wires simultaneously to enter **SETTING MODE**; the lighthead will display its current Group in short flashes:
 - Single flash = Group 1 • Double flash = Group 2
2. Remove **YELLOW** wire from +VDC then momentarily apply to +VDC again for less than 3 seconds to change to the desired Group:
 - Lightheads of the same Group will flash together.
 - Lightheads of two different Groups will flash alternately.
3. Save and exit **SETTING MODE** by disconnecting all power.

NOTE: All warning modes share the same Group setting.

Reset Factory Default Settings:

1. Power up the unit by applying +VDC to **RED** and **YELLOW** wires simultaneously to enter **SETTING MODE**.
2. Remove **YELLOW** wire from +VDC then apply to +VDC again for more than 5 seconds. The lighthead will display fast short flashes to indicate restoring successfully.